




NW 0

HARD CUT

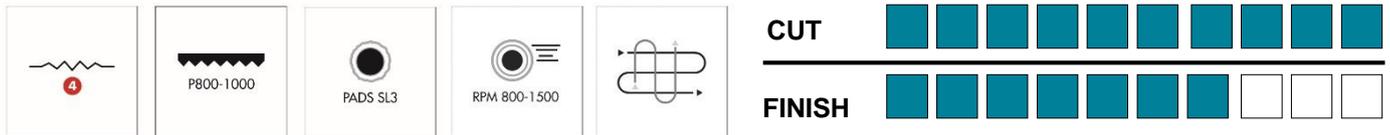

Product description

This is a super cutting compound especially recommended for applications on hard resins such as vinylester. It removes marks and P800-P1000 sand scratches very fast and well, according to the hardness of treated resins. It assures a high quality finish, without overheating and greasing the surface. NW 0 has been expressly formulated by our lab to serve the need of polishing the toughest moulds in the quickest way, achieving unbelievable results.

HOW TO USE: please apply by variable speed polisher, selecting either an anti-scratch wool pad SL3 for a heavier cutting action or an extra-rigid foam pad TP0 for a less aggressive and more precise one. Apply a small quantity of compound on the polisher-pad. Let the polisher turn at low revolutions, speeding them up (800-1500 RPM) while spreading the paste with crossed movements. Pay attention at not overheating the surface. If necessary, please repeat the application more times till the complete removal of scratches. Eventually, wipe it off with a clean cloth

Physical properties

Colour: White

Physical form: Creamy

Odour: Light and pleasant

Explosion limit: None

Flammability: Not flammable

Stability: Tested after exposure to temperatures between - 15°C e + 45°C

IMPERFECTION LEVEL (HIGH 4 > LOW 1)

