


PRO-VAC KM160E1 FLOW MEDIA

Description:

- 3D Knitted mesh
- Compatible with all standard epoxy, polyester and vinylester resin systems
- Highly drapable so can be used on complex moulds
- Can also be used as a reusable breather for debulking at room temperature
- Available up to 2m wide

Technical data:

Part number	PVKM160E1
Colour	Black
Density	160 g/m ² ±5%
Nominal Temp Resistant	120°C
Thickness	1.0 mm
Elongation At break	500%
Tensile Strength	23 N/mm ²

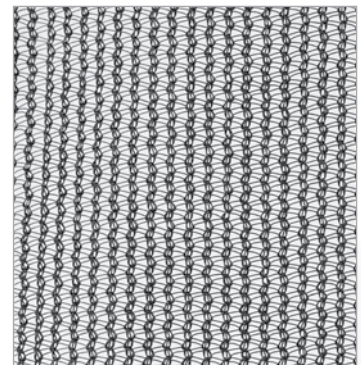

Packaging and storage

Plastic film inside, 100M/Roll.

It is recommended that the products are stored in a cool and dry environment.

The mesh should remain in the packaging until just prior to use.