




NW 1

PREMIUM

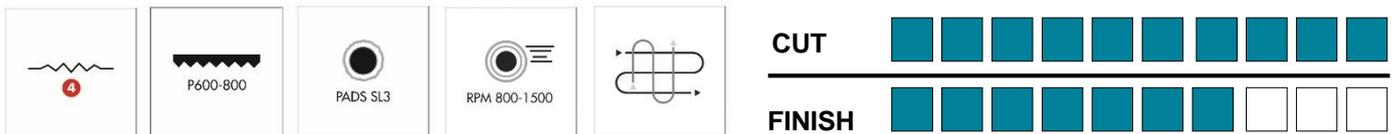

Product description

This is a super cutting compound used either to remove marks and P600-P800 sand scratches (according to the hardness of treated resins) or to restore high-oxidized gelcoats very fast and well, without overheating the surface. It assures a high quality finish without marks and haze as well as with low particles' over-splating. NW 1 is widely appreciated as, through its specific abrasive components, it makes polishing easier and faster and allows to reduce the sanding processes

HOW TO USE: please apply by variable speed polisher, selecting either an anti-scratch wool pad SL3 for a heavier cutting action or a medium-hard foam pad TT02 for a less aggressive one. Apply a small quantity of compound on the polisher-pad. Let the polisher turn at low revolutions, speeding them up (800-1500 RPM) while spreading the paste with crossed movements. Pay attention at not overheating the surface. If necessary, please repeat the application more times till the complete removal of scratches. Eventually, wipe it off with a clean cloth.

Physical properties

Colour: White or Black

Physical form: Creamy

Odour: Light and pleasant

Explosion limit: None

Flammability: Not flammable

Stability: Tested after exposure to temperatures between - 15°C e + 45°C

IMPERFECTION LEVEL (HIGH 4 > LOW 1)

