




NW 6

RAPID CUT

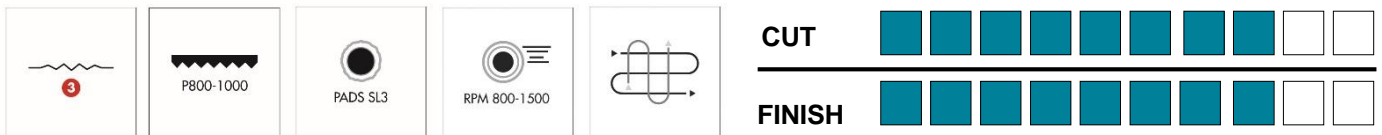

Product description

This is a medium cutting compound used either to remove marks and P800-P1000 sand scratches (according to the hardness of treated resins) or to restore oxidized gelcoats very fast and well, without overheating the surface. It assures an excellent gloss level, minimising the formation of holograms and minor marks. NW 6, through its perfectly balanced components, is the ideal solution for dark coloured and delicate surface treatment, where the aim is a first-class finish.

HOW TO USE: please apply by variable speed polisher, selecting either an anti-scratch wool pad SL3 for a heavier cutting action or a medium-hard foam pad TT02 for a less aggressive one. Apply a small quantity of compound on the polisher-pad. Let the polisher turn at low revolutions, speeding them up (800-1500 RPM) while spreading the paste with crossed movements. Pay attention at not overheating the surface. If necessary, please repeat the application more times till the complete removal of scratches. Eventually, wipe it off with a clean cloth.

Physical properties

Colour: White

Physical form: Creamy

Odour: Light and pleasant

Explosion limit: None

Flammability: Not flammable

Stability: Tested after exposure to temperatures between - 15°C e + 45°C

IMPERFECTION LEVEL (HIGH 4 > LOW 1)

